


EN 1317-2

Úrovně zadržení & energie nárazu

DELTABLOC®

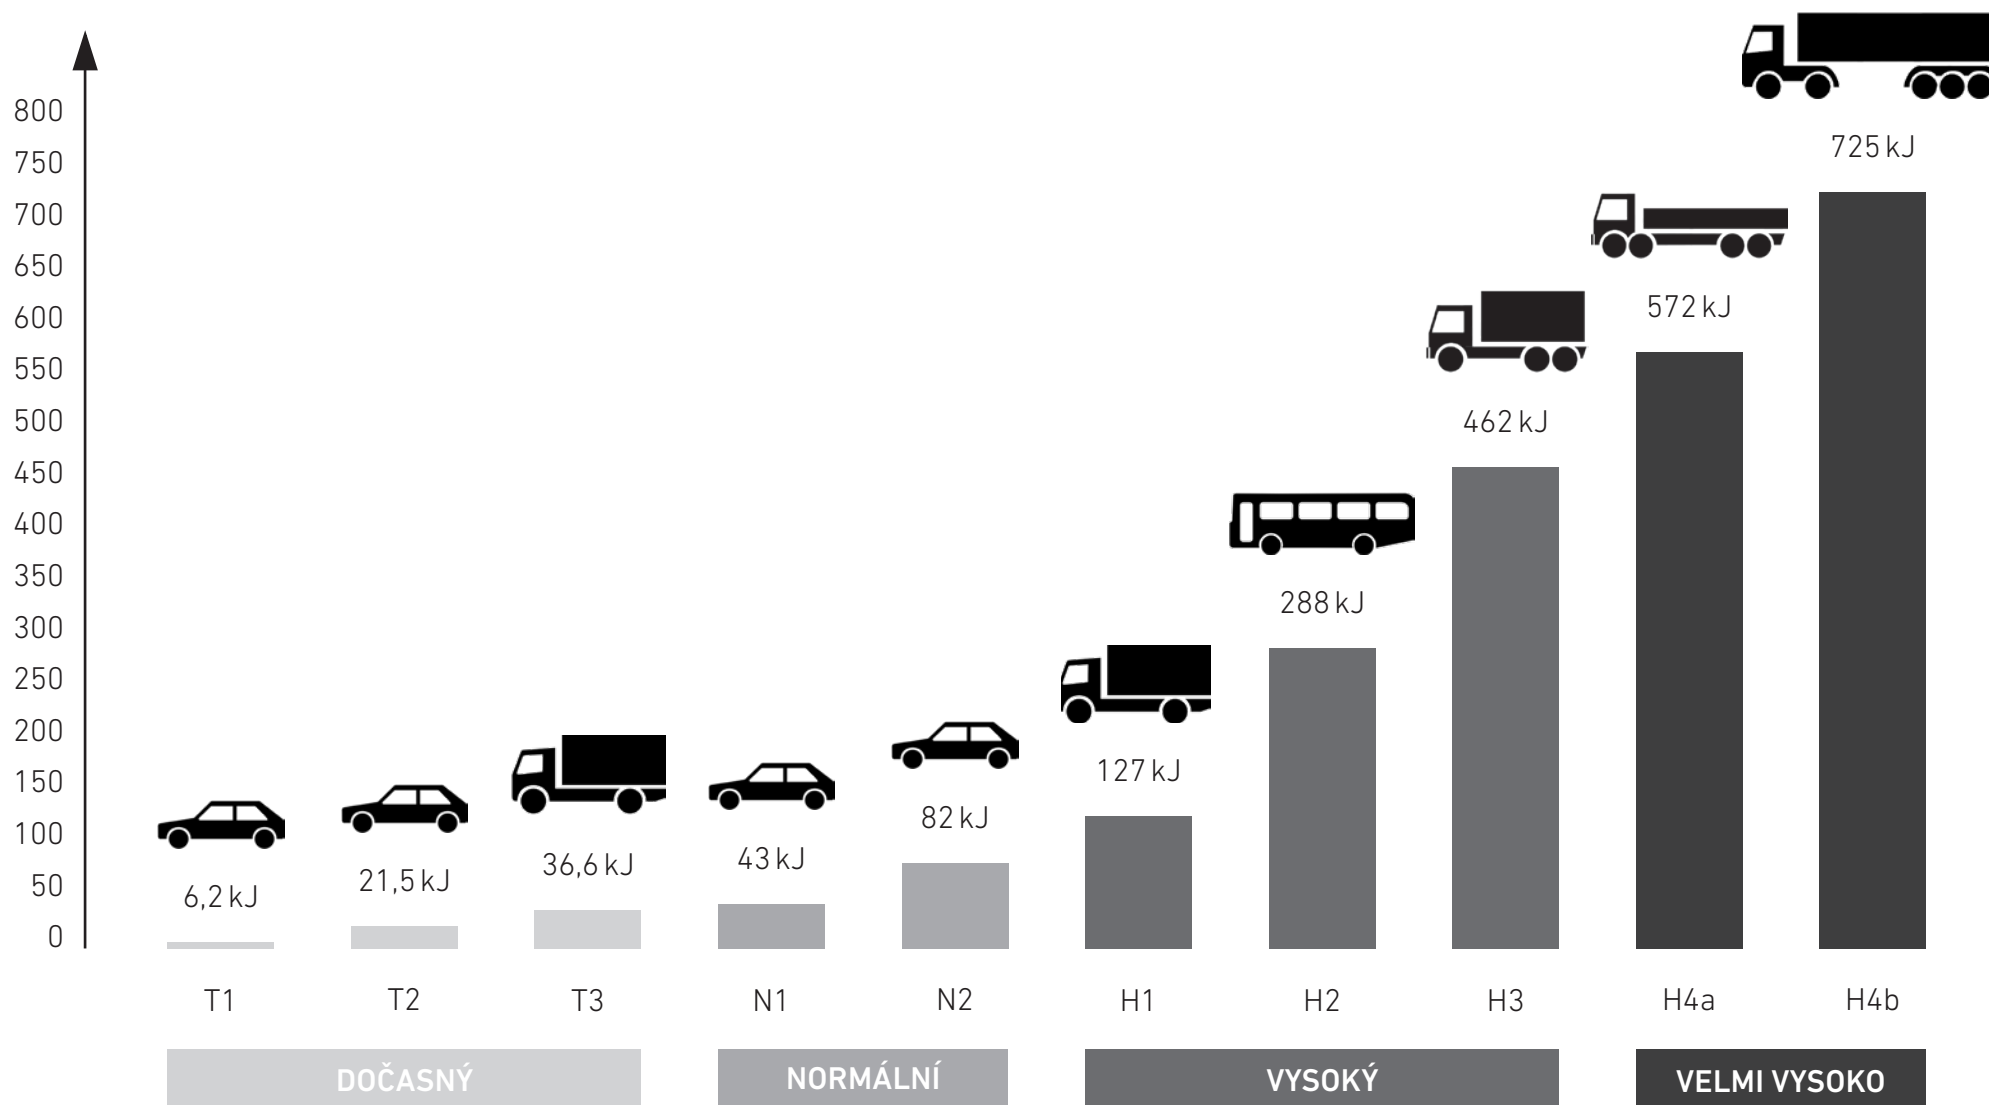

EVROPSKÝ STANDARD EN 1317-2

Definované úrovně zadržení

DELTABLOC®

T1



TB21

T2



TB22

T3



TB41
+ TB21

N1



TB31

N2



TB32
+ TB11

H1



TB42
+ TB11

H2



TB51
+ TB11

H3



TB61
+ TB11

H4a





TB71
+ TB11

H4b



TB81
+ TB11



1,300 kg
80 km/h
Úhel 8°

1,300 kg
80 km/h
Úhel 15°

10,000 kg
70 km/h
Úhel 8°

1,500 kg
80 km/h
Úhel 20°

1,500 kg
110 km/h
Úhel 20°

10,000 kg
70 km/h
Úhel 15°

13,000 kg
70 km/h
Úhel 20°

16,000 kg
80 km/h
Úhel 20°

30,000 kg
65 km/h
Úhel 20°

38,000 kg
65 km/h
Úhel 20°

TB11: 900 kg | 100 km/h | Úhel 20°

VYŠŠÍ ÚROVEŇ ZADRŽENÍ = VYŠŠÍ ENERGIE NÁRAZU